
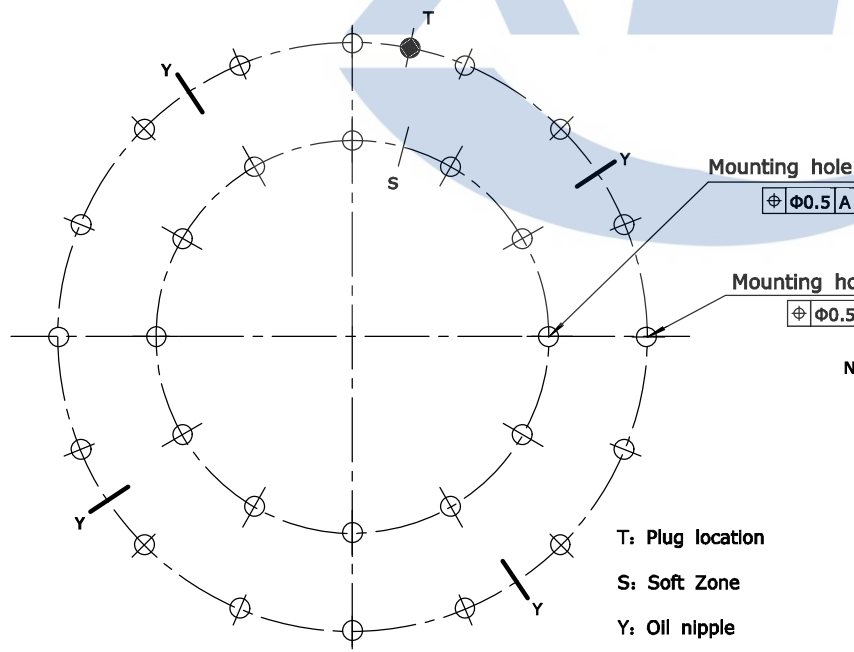
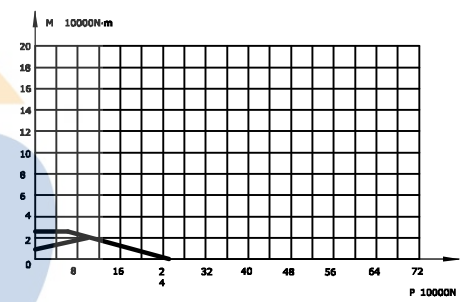



Module	m	5
Teeth no.	z	67
Teeth pressure angle	α	20°
Modification coefficients	x	0
Reduction coefficients	km	0.75
Precision(GB10095-88)		10
Average base tangent length and deviation	W	115.40 +0.39 +0.25
Spanned tooth count.	k	8
Base tangent length change tolerances	Fw	0.1

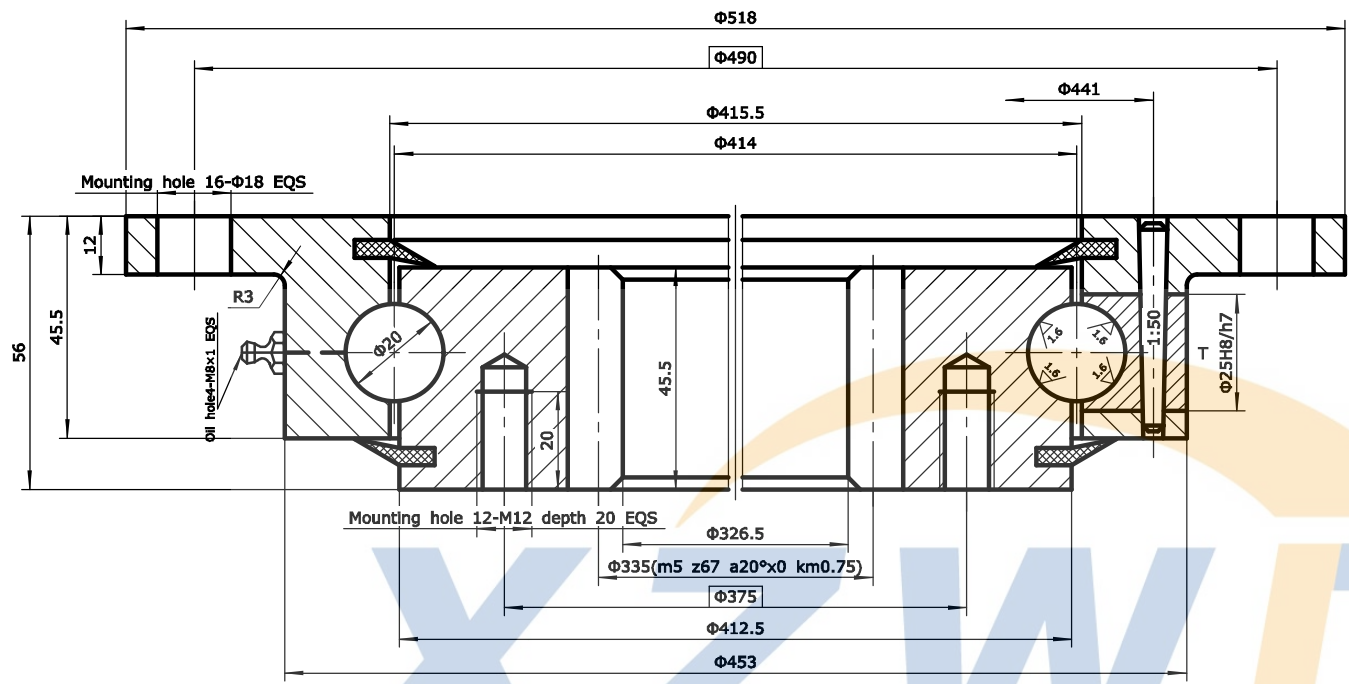

Notes:

1. Unspecified chamfer: 1.0×45°
Through hole chamfer: 1.0×45°
Threaded hole chamfer: 2.0×45°
Edges chamfer
2. Raceway of inner & outer ring induction hardened. hardness: 55~62HRC
Depth: ≥3.0mm
3. Inner & outer ring quenched & tempered, hardness: 207~262HB
4. Radial clearance: 0.10~0.30 mm
Axial clearance: 0.10~0.30 mm

T: Plug location
S: Soft Zone
Y: Oil nipple

08	HG/T2811	Seals	NBRI-3	W17	2	
07	GB117-76	Pin	CN45	φ5×45	1	
06		Plug	CN45	φ25	1	
05	JB/T7940.7	Oil nipple	Component	M8×1	4	
04	GB/T699	Inner ring	50Mn		1	
03	GB/T308-2002	Ball	GCr15	19.844	53±1	
02	HG/T2349	Spacer	Nylon	D20	53±1	
01	GB/T699	Outer ring	50Mn ₁		1	
No.	Standard	Component	Material	Model	Qty	Remark
			Model	WD-232.20.0414	Drawing	Weight 26.9kg
			Name	Slewing Bearing	Qty	Scale
			Material	50Mn	Total 1 page	the 1st page
Design	Standard	 XUZHOU WANDA SLEWING BEARING CO.,LTD Tel: +86 516 83309366 Fax: +86 516 83915766 http://www.slew-bearing.com				
Check						
Process	Approve					
Date						